



$\mu'$  ( $\mu''$ )-Frequency

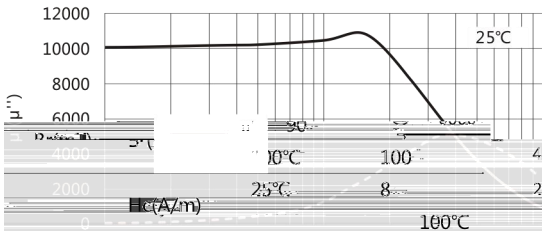


Initial permeability	$\mu_i$	25°C	10000±30%
Saturation magnetic flux density	$B_s$ (mT)	25°C	420
flux density	1194A/m	100°C	220

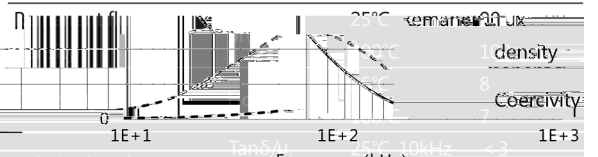


Relative loss factor	$\tan\delta/\mu'$	25°C 10kHz	< 3
Relative loss factor	$\tan\delta/\mu'$	25°C 100kHz	< 20

Hysteresis material constant	$\eta_B$ ( $10^{-6}$ /mT)	25°C 10kHz	< 0.3
Relative temperature coefficient	$\alpha_{\mu r}$	0°C~20°C	-1~1
Relative temperature coefficient	$\alpha_{\mu r}$	20°C~60°C	-1~1

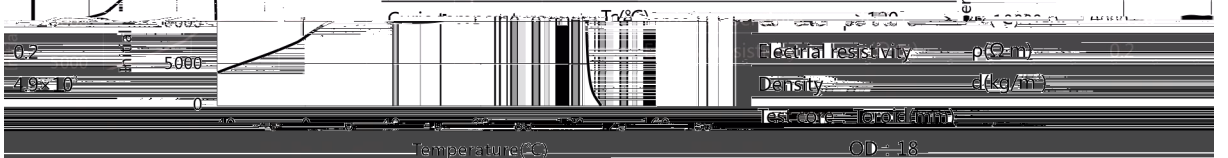

$\tan\delta/\mu'$ -Frequency

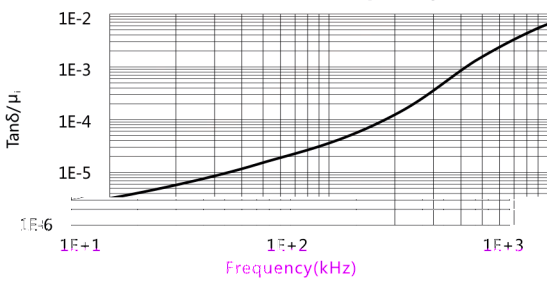

ID : 8  
H : 5

