


Bs-Temperature

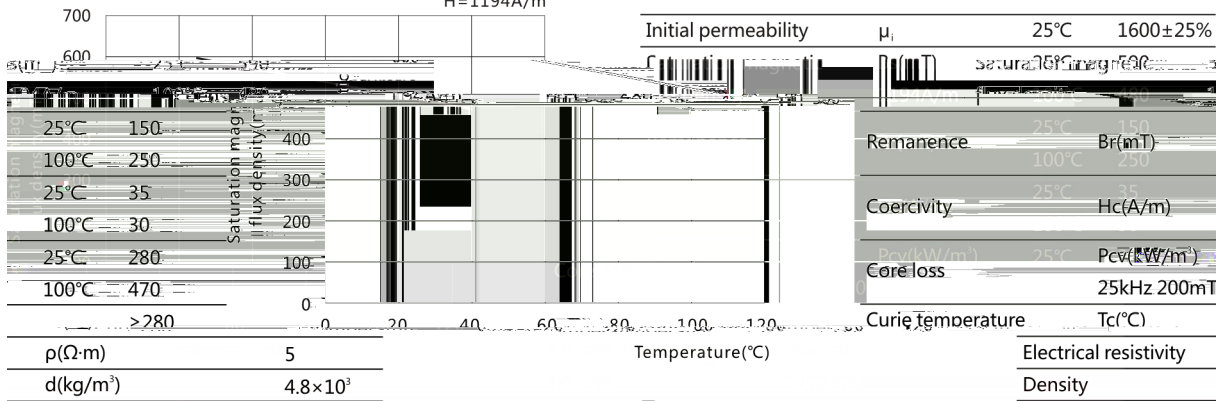


Initial permeability	μ_i	25°C	1600±25%
Remanence	B_r (mT)	25°C	150
Coercivity	H_c (A/m)	25°C	35
Core loss	P_{cv} (W/m³)	25°C	25kHz 200mT
Curie Temperature	T_c (°C)		

ρ (Ω -m)	5
d (kg/m³)	4.8×10^3


Electrical resistivity
Density
Test core : Toroid(mm)

μ_i -Temperature

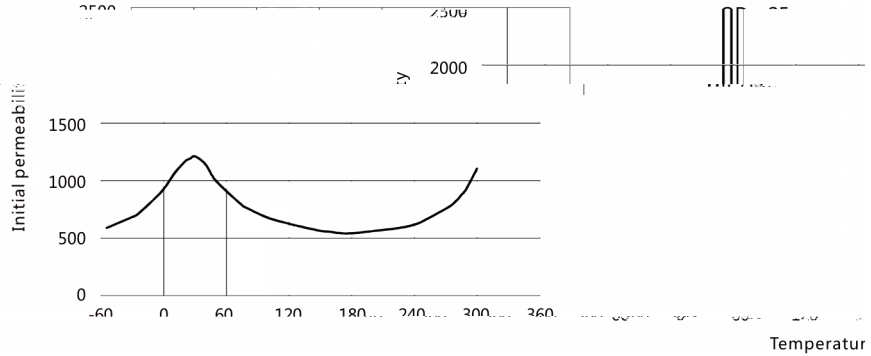

OD : 25
ID : 15
H : 7.5

B-H

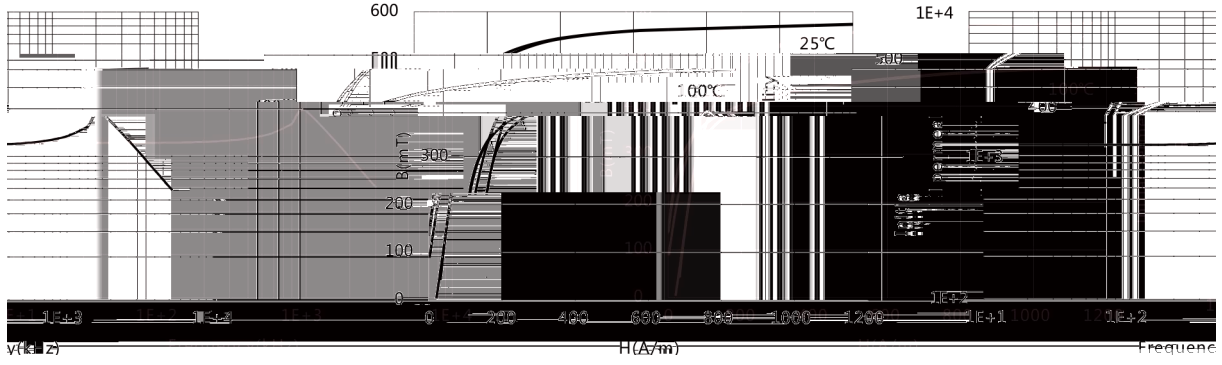

μ_i -Frequency

