



μ' (μ'')-Frequency

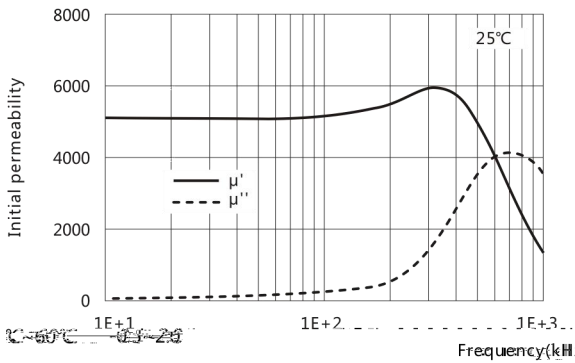


Initial permeability	μ_i	25°C	5500±30%
Saturation magnetic flux density	B_s (mT)	25°C	410
Remanent	B_r (mT)	25°C	70
Coercivity	H_c (A/m)	25°C	6
Relative loss factor 100kHz	$\tan\delta/\mu_i$ ($\times 10^{-6}$)		< 10
Relative temperature coefficient	α_{μ_i}		($\times 10^{-6}/^{\circ}\text{C}$)

μ -Temperature

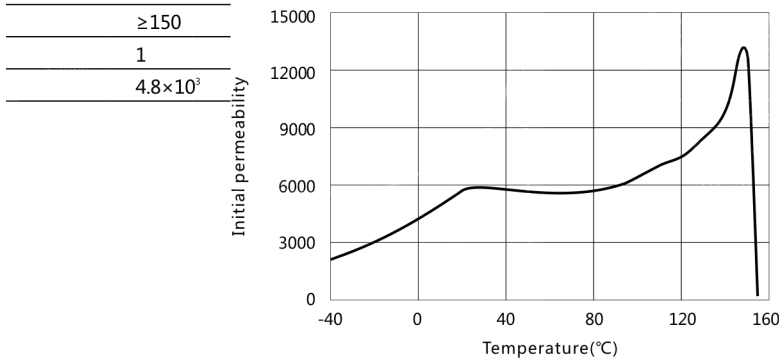

Disaccommodation factor	D_F	($\times 10^{-3}$)
Curie temperature	T_c (°C)	
Electrical resistivity	ρ ($\Omega\cdot\text{m}$)	
Density	d (kg/m^3)	
Test core : Toroid(mm)		
OD : 18		
ID : 8		
H : 5		

$\tan\delta/\mu_i$ -Frequency

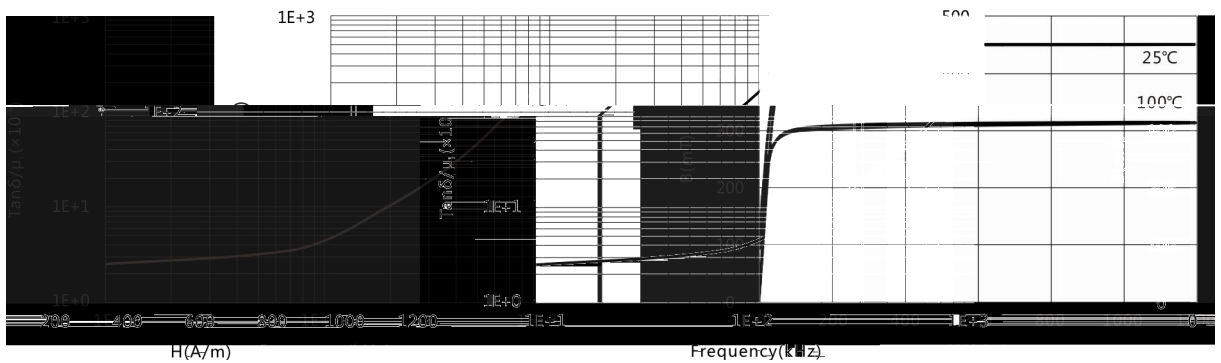

Z-Frequency

N=10TS, Φ 0.35mm, T=25°C

